


H71型对夹单瓣升降式止回阀
H71 Single-plate Wafer Lift Check Valve




对夹止回阀

Wafer Type Check Valves

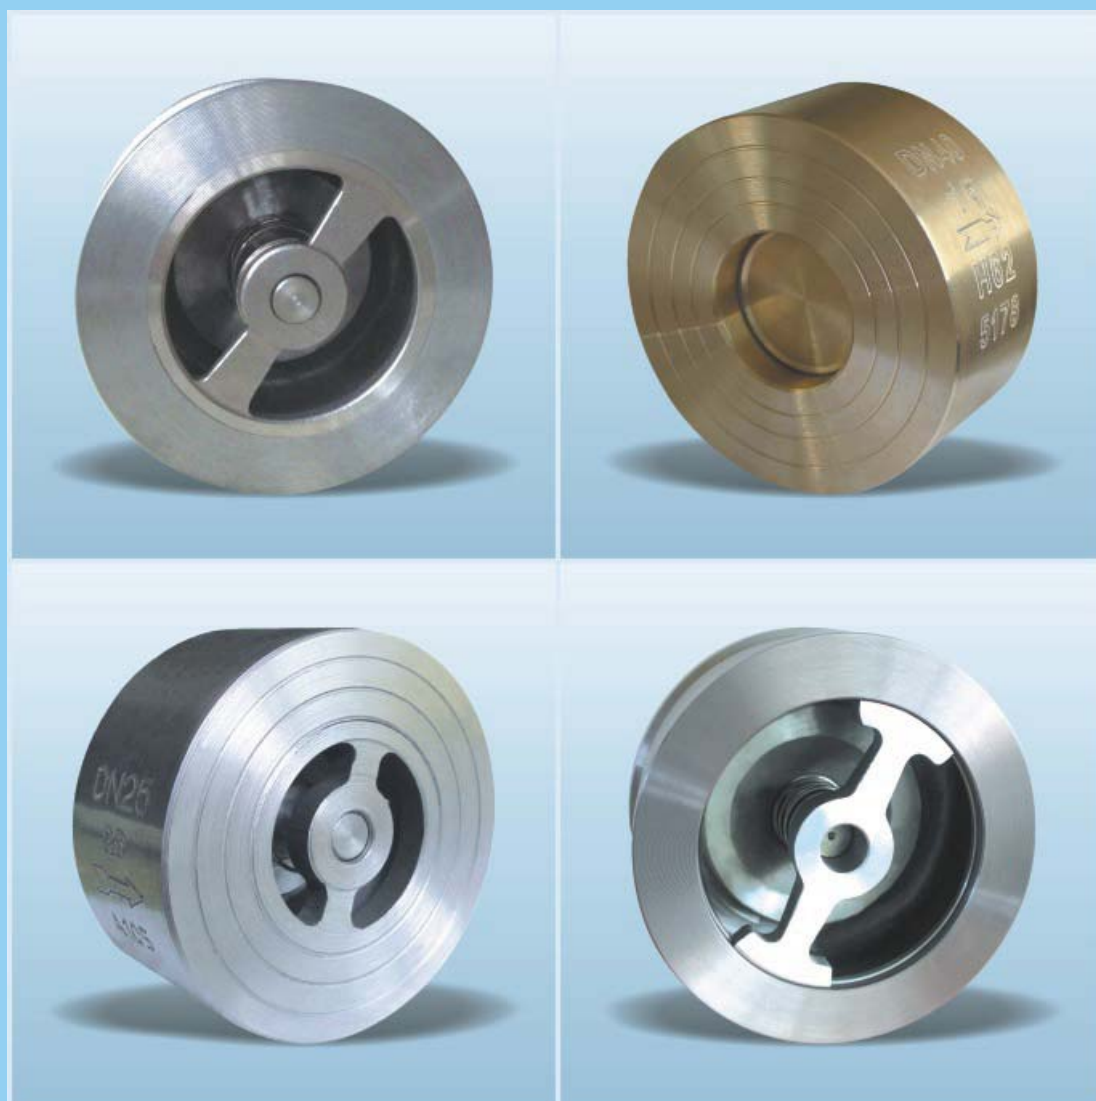

H71H型对夹单瓣升降式止回阀 (美标) API Single-plate Wafer Lift Check Valve

ASME B16.5

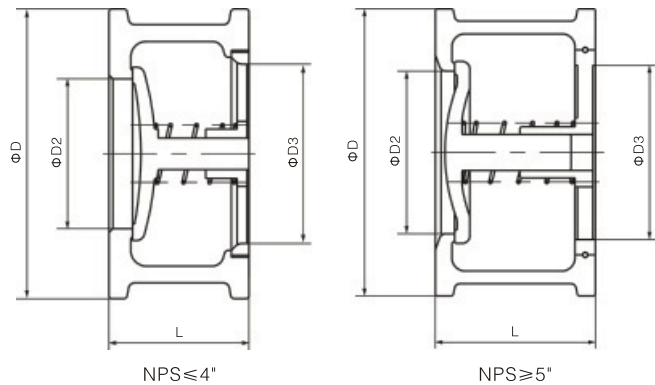

尺寸及重量 (Dimensions & Weights)


口径 Size	压力等级 Pressure Rating	连接端 End facing	尺寸 Dimensions				配管法兰 Pipe Flange					重量 Weight (Kg)
			L	D	D2	D3	D1	螺栓数量 Stud Quantity	螺栓直径d		螺栓长度L1 Stud Length	
									in	mm		
			mm									
1/2" (15)	150	RF	25	46	15	23	60.3	4	1/2	M14	90	0.3
	300	RF	25	52	15	23	66.7	4	1/2	M14	95	0.35
	600	RF	25	52	15	23	66.7	4	1/2	M14	95	0.4
	900	RF	25	62	15	23	82.6	4	3/4	M20	125	0.6
3/4" (20)	150	RF	31.5	56	19	28	69.9	4	1/2	M14	100	0.45
	300	RF	31.5	65	19	28	82.6	4	5/8	M16	110	0.5
	600	RF	31.5	65	19	28	82.6	4	5/8	M16	110	0.8
	900	RF	31.5	69	19	28	88.9	4	3/4	M20	135	0.9
1" (25)	150	RF	35.5	65	24	34	79.4	4	1/2	M14	105	0.6
	300	RF	35.5	72	24	34	88.9	4	5/8	M16	115	0.7
	600	RF	35.5	72	24	34	88.9	4	5/8	M16	115	1
	900	RF	35.5	77	24	34	101.6	4	7/8	M24	155	1.2
1 1/4" (32)	150	RF	40	74	31	42	88.9	4	1/2	M14	115	0.8
	300	RF	40	81	31	42	98.4	4	5/8	M16	125	0.9
	600	RF	40	81	31	42	98.4	4	5/8	M16	125	1.3
	900	RF	40	87	31	42	111.1	4	7/8	M24	160	1.5
1 1/2" (40)	150	RF	45	84	38	50	98.4	4	1/2	M14	120	1.3
	300	RF	45	94	38	50	114.3	4	5/8	M16	140	1.5
	600	RF	45	94	38	50	114.3	4	3/4	M20	140	1.8
	900	RF	45	97	38	50	123.8	4	1	M27	175	2
2" (50)	150	RF	56	103	48	60	120.7	4	5/8	M16	140	2.1
	300	RF	56	110	48	60	127	8	5/8	M16	145	2.4
	600	RF	56	110	48	60	127	8	5/8	M16	155	2.8
	900	RF	56	140	48	60	165.1	8	7/8	M24	195	5.5
2 1/2" (65)	150	RF	63	122	62	78	139.7	4	5/8	M16	155	2.8
	300	RF	63	128	62	78	149.2	8	3/4	M20	175	3
	600	RF	63	128	62	78	149.2	8	3/4	M20	175	4
	900	RF	63	162	62	78	190.5	8	1	M27	215	7.5
3" (80)	150	RF	71	135	76	91	152.4	4	5/8	M16	165	3.6
	300	RF	71	147	76	91	168.3	8	3/4	M20	185	4
	600	RF	71	147	76	91	168.3	8	3/4	M20	190	6
	900	RF	71	165	76	91	190.5	8	7/8	M24	210	8
4" (100)	150	RF	80	173	90	110	190.5	8	5/8	M16	175	4.8
	300	RF	80	179	90	110	200	8	3/4	M20	200	5.5
	600	RF	80	191	90	110	215.9	8	7/8	M24	220	9
	900	RF	80	204	90	110	235	8	1 1/8	M30	245	14
5" (125)	150	RF	110	195	110	135	215.9	8	5/8	M16	210	12
	300	RF	110	214	110	135	235	8	3/4	M20	235	13
	600	RF	110	239	110	135	267	8	1	M27	265	25
	900	RF	110	245	110	135	279.4	8	1 1/4	M33	290	27
6" (150)	150	RF	125	220	127	160	241.3	8	3/4	M20	230	17
	300	RF	125	249	127	160	269.9	12	3/4	M20	255	22
	600	RF	125	265	127	160	292.1	12	1	M27	290	32
	900	RF	125	286	127	160	317.5	12	1 1/8	M30	310	41
8" (200)	150	RF	160	277	165	210	298.5	8	3/4	M20	270	29
	300	RF	160	305	165	210	330.2	12	7/8	M24	305	36
	600	RF	160	318	165	210	349.2	12	1 1/8	M30	345	52
	900	RF	160	356	165	210	393.7	12	1 3/8	M36X3	375	76

对夹止回阀

Wafer Type Check Valves

H71H型对夹单瓣升降式止回阀 (国标短系列) GB Single-plate Wafer Lift Check Valve (Short Patten)

GB/T 9113

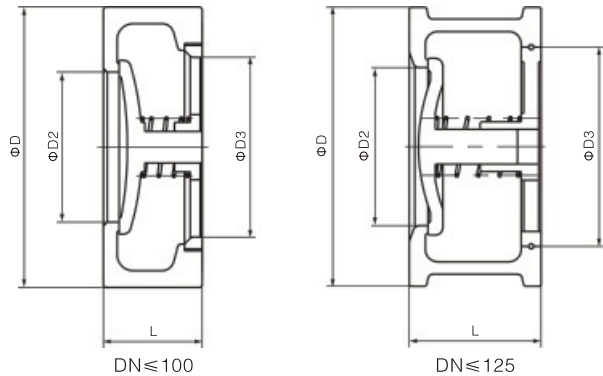

尺寸及重量 (Dimensions & Weights)


口径 Size	压力等级 Pressure Rating	连接端 End facing	尺寸 Dimensions				配管法兰 Pipe Flange					重量 Weight (Kg)
			L	D	D2	D3	D1	螺栓数量 Stud Quantity	螺栓直径d Stud Diameter		螺栓长度L1 Stud Length	
			mm						in	mm		
DN15	PN10	RF	16	52	15	25	65	4	**	M12	75	0.2
	PN16	RF	16	52	15	25	65	4	**	M12	75	0.2
	PN25	RF	16	52	15	25	65	4	**	M12	75	0.2
	PN40	RF	16	52	15	25	65	4	**	M12	75	0.2
DN20	PN10	RF	19	62	19	30	75	4	**	M12	90	0.3
	PN16	RF	19	62	19	30	75	4	**	M12	90	0.3
	PN25	RF	19	62	19	30	75	4	**	M12	90	0.3
	PN40	RF	19	62	19	30	75	4	**	M12	90	0.3
DN25	PN10	RF	22	72	24	36	85	4	**	M12	95	0.4
	PN16	RF	22	72	24	36	85	4	**	M12	95	0.4
	PN25	RF	22	72	24	36	85	4	**	M12	95	0.4
	PN40	RF	22	72	24	36	85	4	**	M12	95	0.4
DN32	PN10	RF	28	83	31	43	100	4	**	M16	110	0.6
	PN16	RF	28	83	31	43	100	4	**	M16	110	0.6
	PN25	RF	28	83	31	43	100	4	**	M16	110	0.6
	PN40	RF	28	83	31	43	100	4	**	M16	110	0.6
DN40	PN10	RF	31.5	93	39	52	110	4	**	M16	115	0.8
	PN16	RF	31.5	93	39	52	110	4	**	M16	115	0.8
	PN25	RF	31.5	93	39	52	110	4	**	M16	115	0.8
	PN40	RF	31.5	93	39	52	100	4	**	M16	115	0.8
DN50	PN10	RF	40	108	48	62	125	4	**	M16	130	1.2
	PN16	RF	40	108	48	62	125	4	**	M16	130	1.2
	PN25	RF	40	108	48	62	125	4	**	M16	130	1.2
	PN40	RF	40	108	48	62	125	4	**	M16	130	1.2
DN65	PN10	RF	46	128	62	75	145	4	**	M16	135	1.8
	PN16	RF	46	128	62	75	145	4	**	M16	135	1.8
	PN25	RF	46	128	62	75	145	8	**	M16	135	1.8
	PN40	RF	46	128	62	75	145	8	**	M16	135	1.8
DN80	PN10	RF	50	142	76	90	160	8	**	M16	140	2.2
	PN16	RF	50	142	76	90	160	8	**	M16	140	2.2
	PN25	RF	50	142	76	90	160	8	**	M16	150	2.2
	PN40	RF	50	142	76	90	160	8	**	M16	150	2.2
DN100	PN10	RF	60	162	92	112	180	8	**	M16	150	3.4
	PN16	RF	60	162	92	112	180	8	**	M16	150	3.4
	PN25	RF	60	168	92	112	190	8	**	M20	165	3.8
	PN40	RF	60	168	92	112	190	8	**	M20	165	3.8
DN125	PN10	RF	90	192	110	132	210	8	**	M16	185	9
	PN16	RF	90	192	110	132	210	8	**	M16	185	9
	PN25	RF	90	194	110	132	220	8	**	M24	210	9.5
	PN40	RF	90	194	110	132	220	8	**	M24	210	9.5
DN150	PN10	RF	106	218	127	160	240	8	**	M20	215	14
	PN16	RF	106	218	127	160	240	8	**	M20	215	14
	PN25	RF	106	224	127	160	250	8	**	M24	230	15
	PN40	RF	106	224	127	160	250	8	**	M24	230	15
DN200	PN10	RF	140	273	165	210	295	8	**	M20	250	24
	PN16	RF	140	273	165	210	295	12	**	M20	250	24
	PN25	RF	140	284	165	210	310	12	**	M24	270	26
	PN40	RF	140	291	165	210	320	12	**	M27	280	28

对夹止回阀

Wafer Type Check Valves

H71H型对夹单瓣升降式止回阀 (国标长系列) GB Single-plate Wafer Lift Check Valve (Long Patten)

GB/T 9113

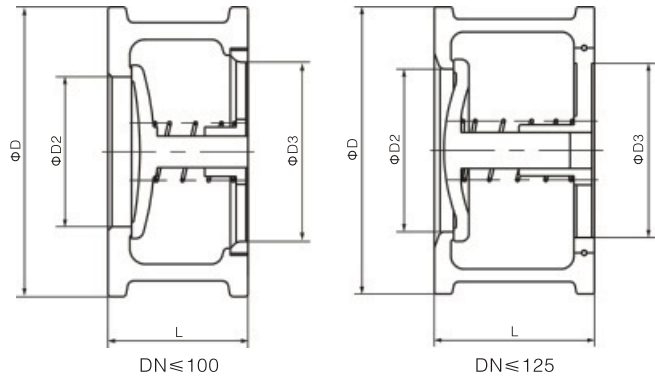

尺寸及重量 (Dimensions & Weights)


口径 Size	压力等级 Pressure Rating	连接端 End facing	尺寸 Dimensions				配管法兰 Pipe Flange					重量 Weight (Kg)
			L	D	D2	D3	D1	螺栓数量 Stud Quantity	螺栓直径d Stud Diameter		螺栓长度L1 Stud Length	
									in	mm		
DN15	PN10/16	RF	25	52	15	25	65	4	**	M12	90	0.3
	PN25	RF	25	52	15	25	65	4	**	M12	90	0.3
	PN40	RF	25	52	15	25	65	4	**	M12	90	0.3
	PN63	RF	25	62	15	25	75	4	**	M12	100	0.6
	PN100	RF	25	62	15	25	75	4	**	M12	100	0.6
DN20	PN160	RF	25	62	15	25	75	4	**	M12	100	0.6
	PN10/16	RF	31.5	62	19	30	75	4	**	M12	100	0.45
	PN25	RF	31.5	62	19	30	75	4	**	M12	100	0.45
	PN40	RF	31.5	62	19	30	75	4	**	M12	100	0.45
	PN63	RF	31.5	73	19	30	90	4	**	M16	115	1
DN25	PN100	RF	31.5	73	19	30	90	4	**	M16	115	1
	PN160	RF	31.5	73	19	30	90	4	**	M16	115	1
	PN10/16	RF	35.5	72	24	36	85	4	**	M12	105	0.6
	PN25	RF	35.5	72	24	36	85	4	**	M12	105	0.6
	PN40	RF	35.5	72	24	36	85	4	**	M12	105	0.6
DN32	PN63	RF	35.5	83	24	36	100	4	**	M16	130	1.3
	PN100	RF	35.5	83	24	36	100	4	**	M16	130	1.3
	PN40	RF	35.5	83	24	36	100	4	**	M16	130	1.3
	PN10/16	RF	40	83	31	43	100	4	**	M16	115	1.4
	PN25	RF	40	83	31	43	100	4	**	M16	115	1.4
DN40	PN40	RF	40	83	31	43	100	4	**	M16	115	1.4
	PN63	RF	40	89	31	43	110	4	**	M16	140	2.5
	PN100	RF	40	89	31	43	110	4	**	M16	140	2.5
	PN160	RF	40	89	31	43	110	4	**	M16	140	2.5
	PN10/16	RF	45	93	39	52	110	4	**	M16	120	1.4
DN50	PN25	RF	45	93	39	52	110	4	**	M16	120	1.4
	PN40	RF	45	93	39	52	110	4	**	M16	120	1.4
	PN63	RF	45	104	39	52	125	4	**	M20	150	2.5
	PN100	RF	45	104	39	52	125	4	**	M20	150	2.5
	PN160	RF	45	104	39	52	125	4	**	M20	150	2.5
DN65	PN10/16	RF	56	108	48	62	125	4	**	M16	140	2.3
	PN25	RF	56	108	48	62	125	4	**	M16	140	2.3
	PN40	RF	56	108	48	62	125	4	**	M16	140	2.3
	PN63	RF	56	114	48	62	135	4	**	M20	160	3.8
	PN100	RF	56	120	48	62	145	4	**	M24	175	5.6
DN80	PN160	RF	56	120	48	62	145	4	**	M24	175	5.6
	PN10/16	RF	63	128	62	75	145	4	**	M16	150	3
	PN25	RF	63	128	62	75	145	8	**	M16	150	3
	PN40	RF	63	128	62	75	145	8	**	M16	150	3
	PN63	RF	63	138	62	75	160	8	**	M20	170	6
DN100	PN100	RF	63	144	62	75	170	8	**	M24	185	6.5
	PN160	RF	63	144	62	75	170	8	**	M24	185	7

对夹止回阀

Wafer Type Check Valves

H71H型对夹单瓣升降式止回阀 (国标长系列) GB Single-plate Wafer Lift Check Valve (Long Patten)

GB/T 9113

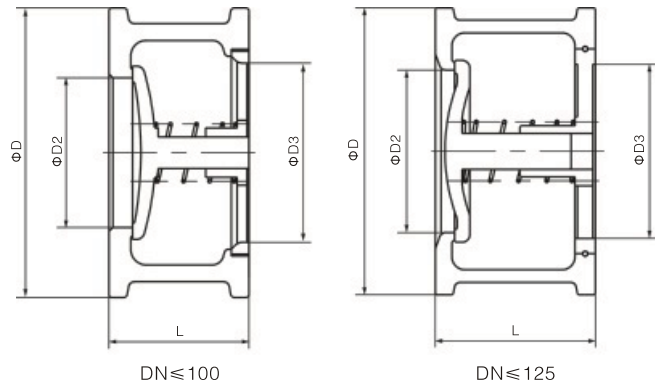

尺寸及重量 (Dimensions & Weights)

口径 Size	压力等级 Pressure Rating	连接端 End facing	尺寸 Dimensions				配管法兰 Pipe Flange				重量 Weight (Kg)	
			L	D	D2	D3	D1	螺栓数量 Stud Quantity	螺栓直径d			螺栓长度L1 Stud Length
			mm						in	mm		
DN80	PN10/16	RF	71	142	76	90	160	8	**	M16	155	3.8
	PN25	RF	71	142	76	90	160	8	**	M16	165	3.8
	PN40	RF	71	142	76	90	160	8	**	M16	165	3.8
	PN63	RF	71	148	76	90	170	8	**	M20	180	5
	PN100	RF	71	154	76	90	180	8	**	M24	195	7
DN100	PN160	RF	71	154	76	90	180	8	**	M24	195	7
	PN10	RF	80	162	92	112	180	8	**	M16	170	5
	PN25	RF	80	168	92	112	190	8	**	M20	190	5.3
	PN40	RF	80	168	92	112	190	8	**	M20	190	5.3
	PN63	RF	80	174	92	112	200	8	**	M24	200	7
DN125	PN100	RF	80	181	92	112	210	8	**	M24	220	10
	PN160	RF	80	181	92	112	210	8	**	M27	220	10
	PN10/16	RF	110	192	110	132	210	8	**	M16	200	11
	PN25	RF	110	192	110	132	220	8	**	M24	225	12
	PN40	RF	110	194	110	132	220	8	**	M24	225	12
DN150	PN63	RF	110	211	110	132	240	8	**	M27	245	15
	PN100	RF	110	218	110	132	250	8	**	M30	265	18
	PN160	RF	110	218	110	132	250	8	**	M30	265	18
	PN10/16	RF	125	218	127	160	240	8	**	M20	225	16
	PN25	RF	125	224	127	160	250	8	**	M24	245	18
DN200	PN40	RF	125	224	127	160	250	8	**	M24	245	19
	PN63	RF	125	248	127	160	280	8	**	M30	270	22
	PN100	RF	125	258	127	160	290	12	**	M30	285	30
	PN160	RF	125	258	127	160	290	12	**	M30	285	30
	PN10	RF	160	273	165	210	295	8	**	M20	260	28
DN200	PN16	RF	160	273	165	310	295	12	**	M20	260	28
	PN25	RF	160	284	165	210	310	12	**	M24	285	30
	PN40	RF	160	291	165	210	320	12	**	M27	295	32
	PN63	RF	160	310	165	210	345	12	**	M33	325	40
	PN100	RF	160	324	165	210	360	12	**	M33	345	56
	PN160	RF	160	325	165	210	360	12	**	M33	345	58

